


Archers' Forms

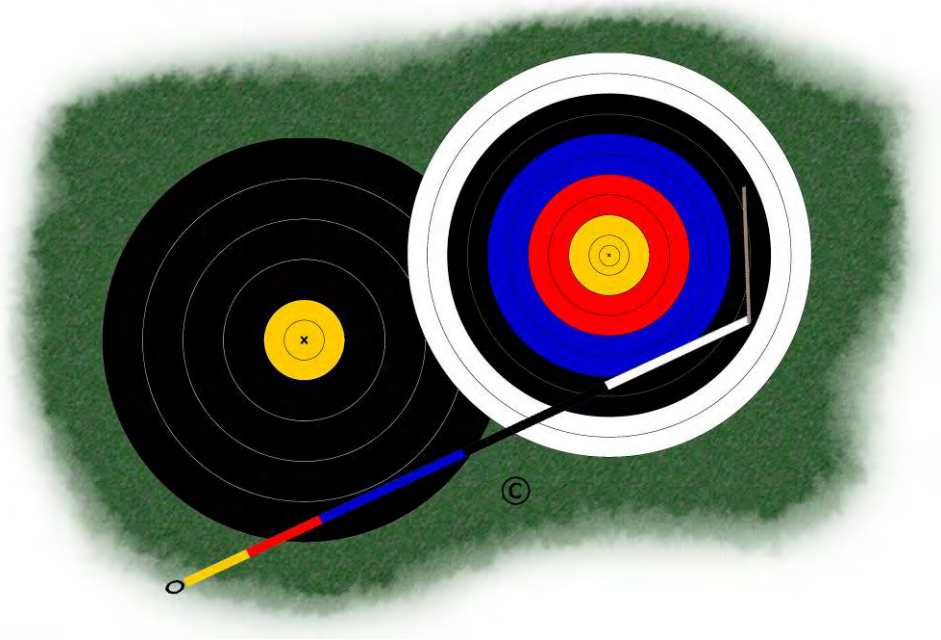

Personal Archery Equipment Details

Recurve Bow

Name:

Club Name:

Date Completed:



This form may be used without modification by any interested archer or archery club.
If any archer or archery club wishes to adapt this form to better fit their requirements, they may do so on condition that result is not offered for sale, that the *original* source is clearly acknowledged, that the logo and brand name are replaced *and* that these conditions are passed on in full.
This document is licensed under a Creative Commons Attribution Non-Commercial Share-Alike 3.0 license; for details, please visit http://creativecommons.org/licenses/by-nc-sa/3.0/deed.en_GB

© 2009 - Kent Archery Association

ARROWS

Arrow Purpose:	Outdoors	Indoors
Shaft:		
Manufacturer		
Type		
Model		
Nominal Static Spine		
Nock:		
Manufacturer		
Model		
Slot size (reference number or throat width)		
Nock Weight (gr.)		
Point:		
Insert Type		
Insert Weight		
Point Type		
Point Weight (gr.)		
Fletches:		
Manufacturer		
Model		
Length (ins.)		
Fletch Weight (gr.)		
Fletch position (nock slot to back edge) (ins.)		
Fletch angle (°)		
Completed Arrow:		
Cut length (nock slot -> end of shaft) (ins.)		
All up length (nock slot to point) (ins.)		
Total Weight (gr.)		
Balance Point (% FoC)		

TAB

Tab:	
Manufacturer	
Model	
Size	
Platform position (centre of arrow slot - top of platform) (mm.)	
Facing material	
Backing material	
Number of backing layers	
Customisations	

BOW

Arrow Purpose:	Outdoors	Indoors
Arrow Speed: (f.p.s.)		
Riser:		
Manufacturer		
Model		
Serial number		
Length (nominal) (ins.)		
Window cut beyond centre (mm.)		
Colour		
Hand grip		
Limbs:		
Manufacturer		
Model		
Serial number		
Length (ins.)		
Nominal weight (at 28" ATA) (lb.)		
Actual weight set ⁱ (at draw length, 20°C) (lb.)		
Upper limb bolt (turns from bolt thread engagement)		
Lower limb bolt (turns from bolt thread engagement)		
Brace height (to pressure button centre) (mm.)		
Tiller setting (top) (mm.)		
Tiller setting (bottom) (mm.)		
Tiller (mm.)		
String:		
Material		
Structure		
Strands		
Additional strands to pack nocking point		
Length (twisted, non-loaded) (ins.)		
String jig length setting (or untwisted length, if you buy from a retailer)		
Nock height (to inside of bottom/top nock locator) (mm.)		
Serving material		
Pressure Button		
Manufacturer		
Model		
Button ref. (identifying mark, if you use more than one)		
Centre shot setting		
Spring pressure setting ⁱⁱ		
Clicker:		
Manufacturer		
Model		
Blade position (back edge from button centre) (mm.)		
Sight:		
Manufacturer		
Model		
Sight ring		
Extension		
Distance from arrow axis to centre of eye ⁱⁱⁱ (mm)		
Distance from bow sight to eye (mm)		

STABILISATION

Long rod:	
Manufacturer	
Model	
Length	(ins.)
Damper	
Weights used	

V-bar extender:	
Manufacturer	
Model	
Length	(ins.)

V-bar holder:	
Manufacturer	
Model	
Horizontal angle	(from centre line) (°)
Vertical angle	(from line of long rod) (°)
TFC	

Twin rods:	
Manufacturer	
Model	
Length	(ins.)
Damper	
Weights used	

Top rod:	
Manufacturer	
Model	
Length	(ins.)
Damper	
Weights used	

Bottom rod:	
Manufacturer	
Model	
Length	(ins.)
Damper	
Weights used	

Balance Weight:	
Manufacturer	
Model	
Length	(ins.)
Damper	
Weights used	

Important Notes: A copy of this form should be kept with your equipment. In case of problems while shooting, this will allow you to quickly check the main adjustments.

ⁱ Bow limbs may give a different weight at extreme temperatures; bow scales may also give different readings according to ambient temperature. Try and keep to normal room temperature or mild outdoor conditions.

ⁱⁱ Button checkers of the same model may give different results because of spring variation, but are usually accurate enough to allow checking and basic set-up of a button.

ⁱⁱⁱ Eye distances are used in sight-mark calculation software to determine the arrow's exit angle (initial trajectory).